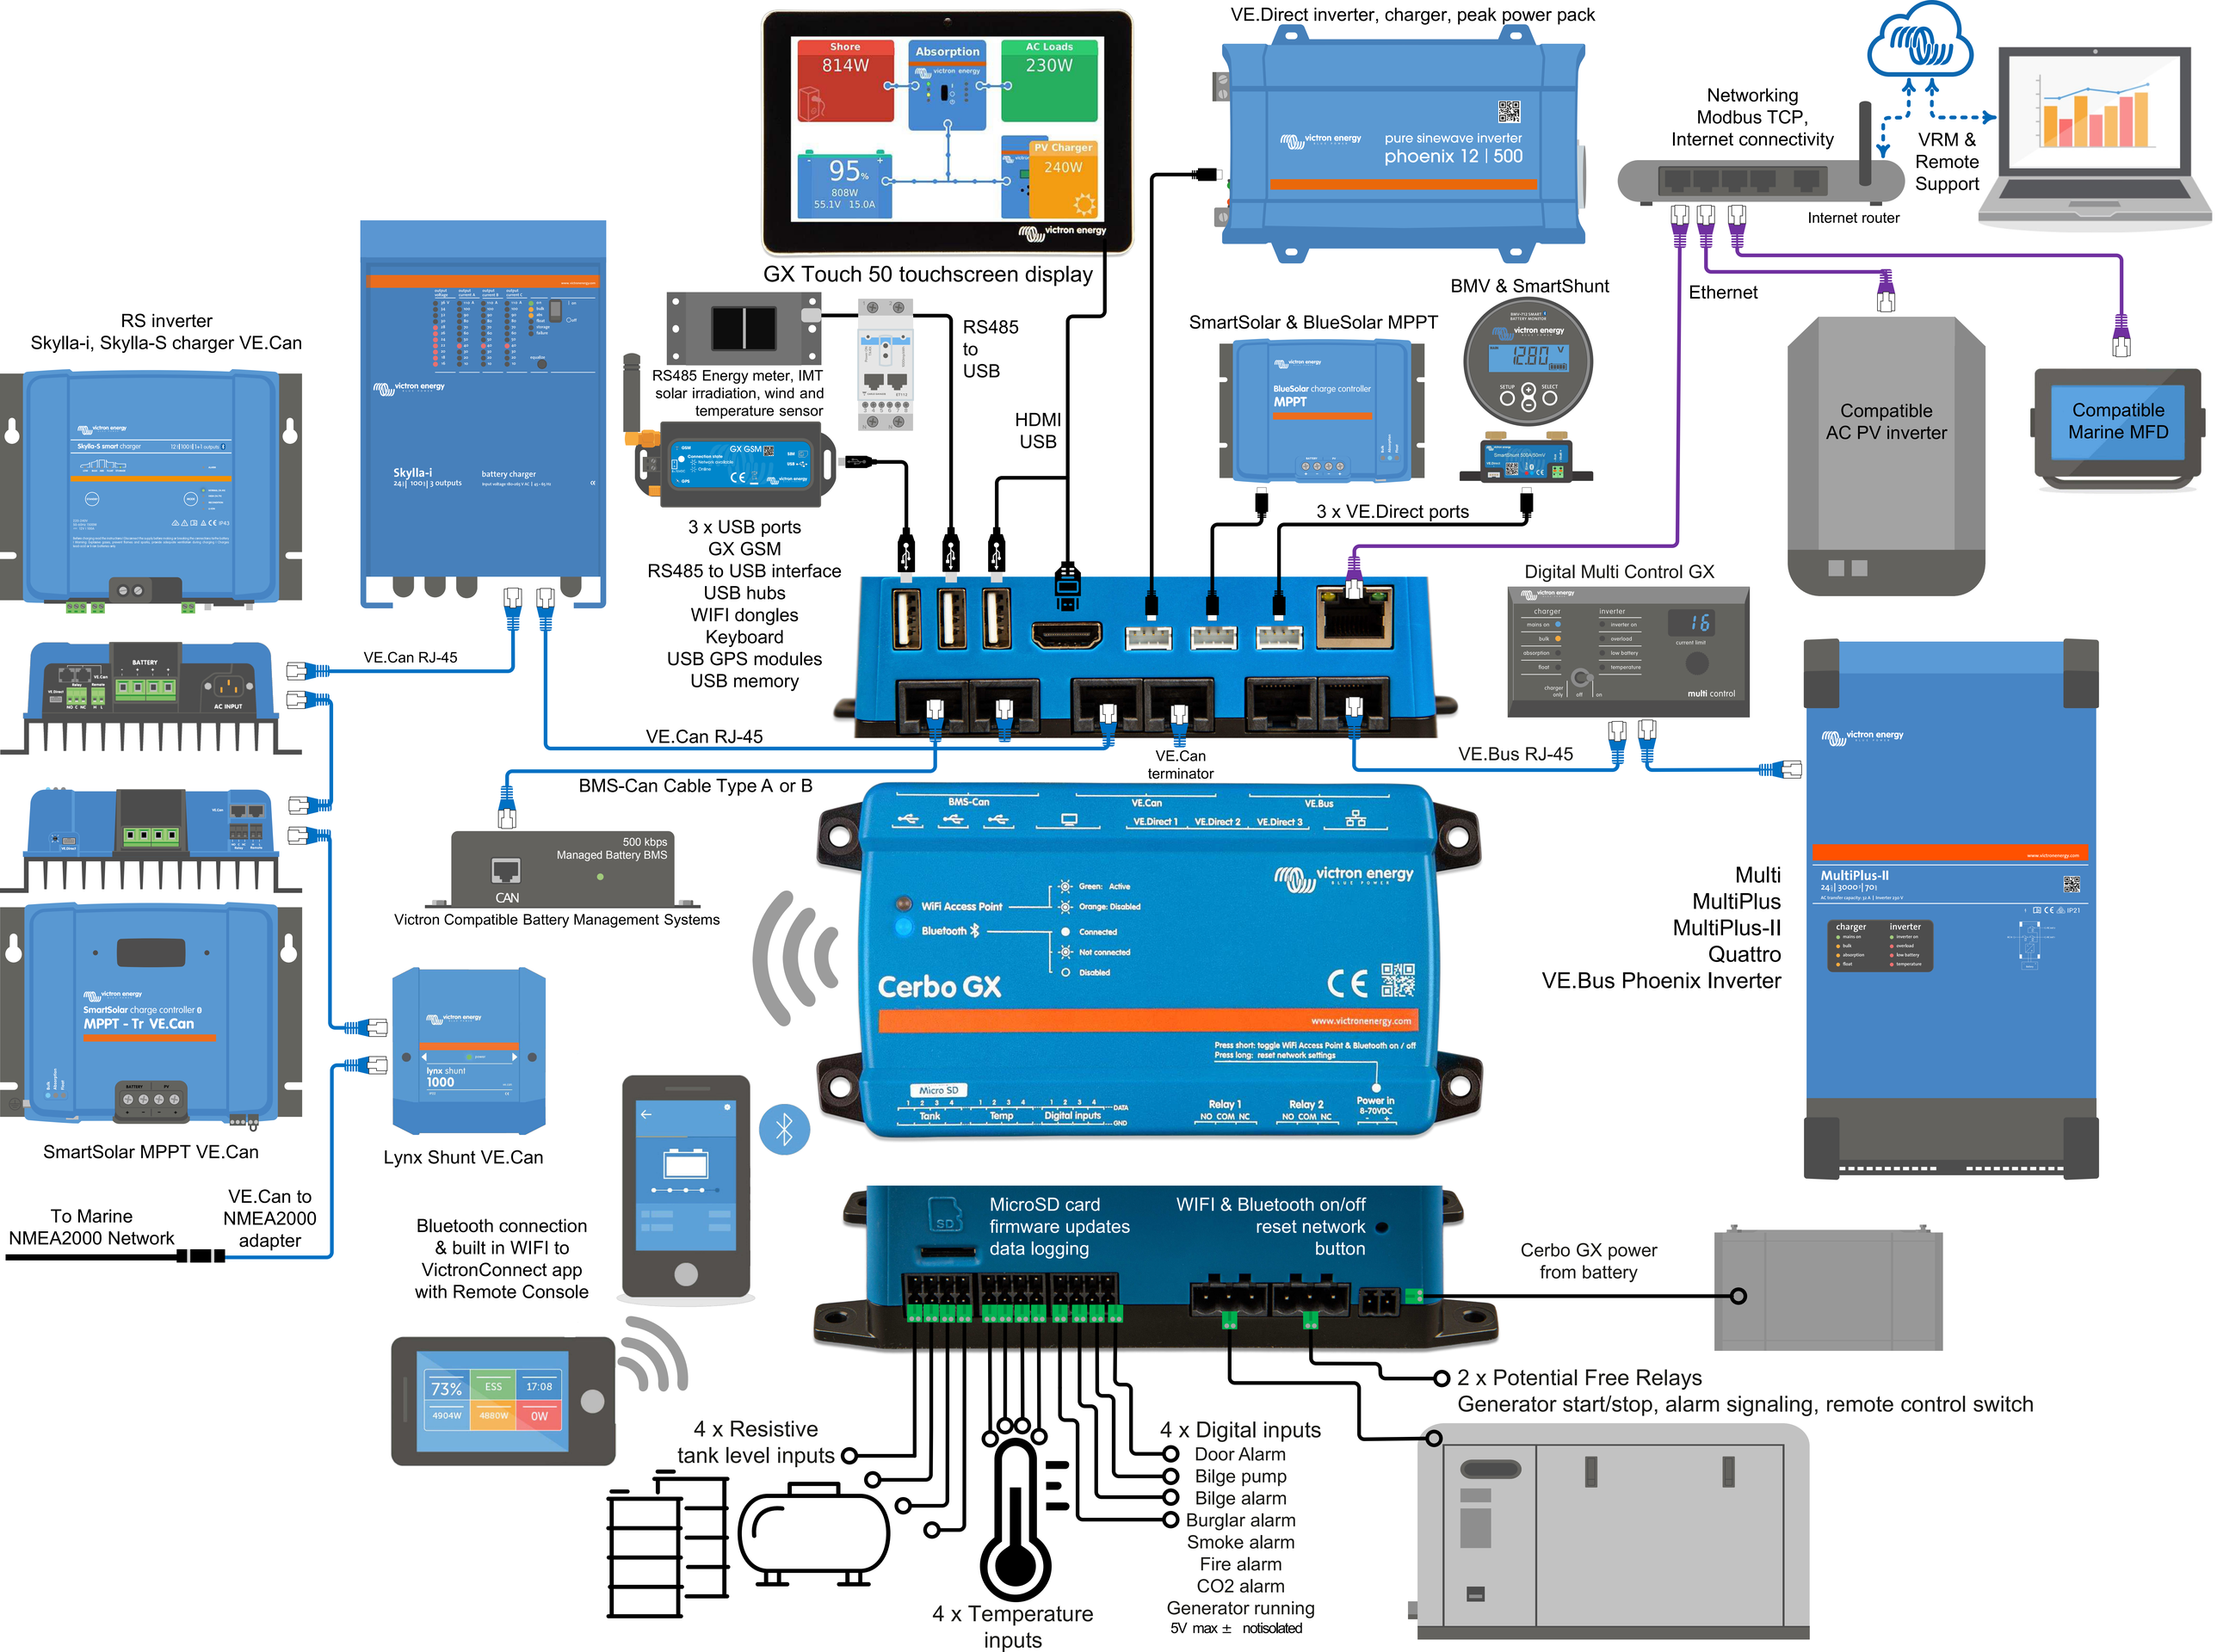
GX Touch 50 touchscreen display
Shore
814W
Absorption
AC Loads
230W
95%
808W
55.1V 15.0A
PV Charger
240W
VE.Direct inverter, charger, peak power pack
pure sinewave inverter
phoenix 12 | 500
Networking
Modbus TCP,
Internet connectivity
Internet router
VRM &
Remote
Support
Ethernet
RS inverter
Skylla-i, Skylla-S charger VE.Can
Skylla-i
battery charger
RS485 Energy meter, IMT
solar irradiation, wind and
temperature sensor
RS485
to
USB
HDMI
USB
SmartSolar & BlueSolar MPPT
BlueSolar charge controller
MPPT
BMV & SmartShunt
3 x VE.Direct ports
Compatible
AC PV inverter
Compatible
Marine MFD
3 x USB ports
GX GSM
RS485 to USB interface
USB hubs
WIFI dongles
Keyboard
USB GPS modules
USB memory
Digital Multi Control GX
multi control
VE.Can RJ-45
VE.Can RJ-45
VE.Can
terminator
VE.Bus RJ-45
BMS-Can Cable Type A or B
500 kbps
Managed Battery BMS
CAN
Victron Compatible Battery Management Systems
Cerbo GX
WiFi Access Point
Bluetooth
Green: Active
Orange: Disabled
Connected
Not connected
Disabled
www.victronenergy.com
Micro SD
Tank
Temp
Digital inputs
Relay 1
Relay 2
Power in
8-70VDC
Multi
MultiPlus
MultiPlus-II
Quattro
VE.Bus Phoenix Inverter
MultiPlus-II
SmartSolar MPPT VE.Can
Lynx Shunt VE.Can
To Marine
NMEA2000 Network
VE.Can to
NMEA2000
adapter
Bluetooth connection
& built in WIFI to
VictronConnect app
with Remote Console
MicroSD card
firmware updates
data logging
WIFI & Bluetooth on/off
reset network
button
Cerbo GX power
from battery
2 x Potential Free Relays
Generator start/stop, alarm signaling, remote control switch
4 x Resistive
tank level inputs
4 x Temperature
inputs
4 x Digital inputs
Door Alarm
Bilge pump
Bilge alarm
Burglar alarm
Smoke alarm
Fire alarm
CO2 alarm
Generator running
5V max ± notisolated